


Order by 5pm for Next Day Delivery

Technical Drawings

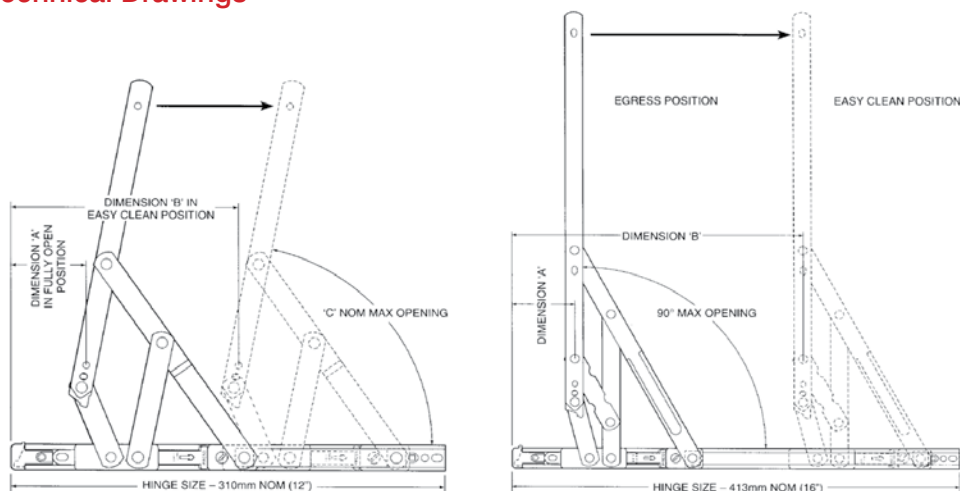

Fixing Hole Details

Description	Size (")	A (mm)	B (mm)	D (Degrees)
Top Hung	12"	54	163	80°
Top hung	16"	57	268	90°

Recommended Maximum Sash

Description	Size (")	Width (mm)	Height (mm)	Weight (kg)	Opening (°)
Top Hung	12	600	300	22	80
Top Hung	16	780	400	24	90

Defender Egress Friction Stays allow casement windows to open fully for safe emergency exit & features an easy-clean facility.

- Suitable for side hung casement windows
- Allows casement windows to open to a fully for emergency exit to comply with the British Standard BS5588 Part 1: 1990 and Building Regulations Approved Document B for fire escape windows
- Manufactured from high grade Austenitic (304) and Ferritic (430) stainless steel
- Available in 13mm, 16mm and 17mm stack heights
- Recommended maximum sash weight - 22kg - 24 kg
- Side hung application sizes available: 12" or 16"
- Successfully tested to 50,000 cycles
- Achieves 96 hours salt spray test
- BBA approved product
- Box quantity - 25



Part Numbers

Description	Size (")	13mm Stack Height	16mm Stack Height	17mm Stack Height
Top Hung	12	028284	028288	028292
Top Hung	16	028286	028290	028294

Guarantees & Accreditations

2 Labour
Guarantee
years

10 Mechanical
Guarantee
years



visit us today at

www.mila.co.uk

call our sales team today on

01327 312 400