


Order by 5pm for Next Day Delivery

Technical Drawings

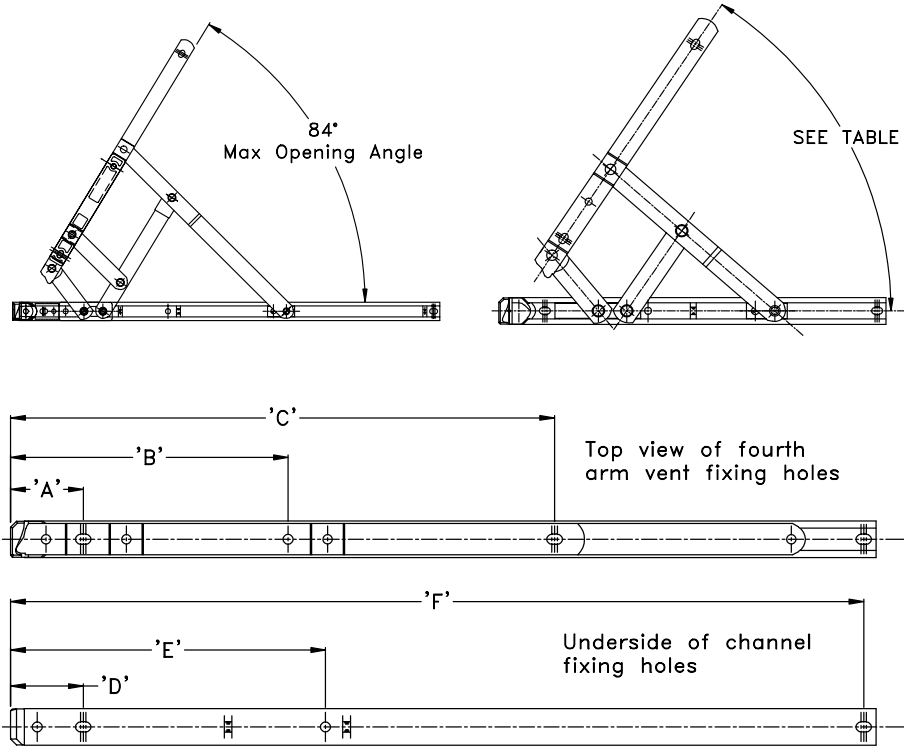

Fixing Hole Details

	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)
Side Hung 10"	34.7	62.1	192.4	31.0	100.5	254.8
Side Hung 16"	34.5	137.5	271.4	36.3	157.3	407.1

Recommended Maximum Sash

Description	Size (")	Width (mm)	Height (mm)	Weight (kg)	Opening (°)
Side Hung	10"	600	1200	16	80°
Side Hung	16"	600	1200	21	84°

iDeal Egress Stays provide an emergency exit facility for side hung casement windows.

iDeal Friction Stays allow casement windows to satisfy the emergency egress requirements of Approved Document B of the Building Regulations.

- Manufactured from high grade Austenitic (304) and Ferritic (430) stainless steel which one?
- Suitable for side hung applications
- Recommended maximum sash weight - 21 kg
- Available in 13mm or 17mm stack height
- Available in sizes 10" or 16"
- Successfully tested to 50, 000 cycles
- Achieves 96 hours salt spray test
- Secured By Design licensed product
- BBA approved product
- Box quantity: 50



Part Numbers

Description	Size (")	13mm Stack Height	17mm Stack Height
Side Hung	10"	022926	022976
Side Hung	16"	022928	022978

Guarantees & Accreditations

2 Labour Guarantee **10** Mechanical Guarantee
years years

visit us today at

www.mila.co.uk

call our sales team today on

01327 312 400