


## Technical Data

Type	4 Roller
Operation	Lever/Lever
Pz (mm)	92
Backset (mm)	25, 28, 30, 35, 40, 45
Faceplate (mm)	16 or 24mm U
<b>Material Specification</b>	
Lock Case	Steel acc. En 10149/zinc plated
Face Plate	Steel acc. En 10149
Latch Bolt	Zinc diecasting acc. 1743-2/nickel plated En 12540
Deadbolt	Zinc diecasting acc. 1743-2/nickel plated En 12540
Spindle Square	Brass acc. DIN 1709
Handle-Spring Housing	Zinc diecasting acc.. 1743-2/yellow bichromated En 12330
Handle-Spring	Steel acc. DIN 2076-D
Drive Gear	Steel acc. En 10149
Slider	Steel acc. En 10149/zinc plated
Tumbler	Zinc diecasting acc. 1743-2/nickel plated En 12540
Tumbler Spring	Steel acc. DIN 2076-D
Box Quantity	5

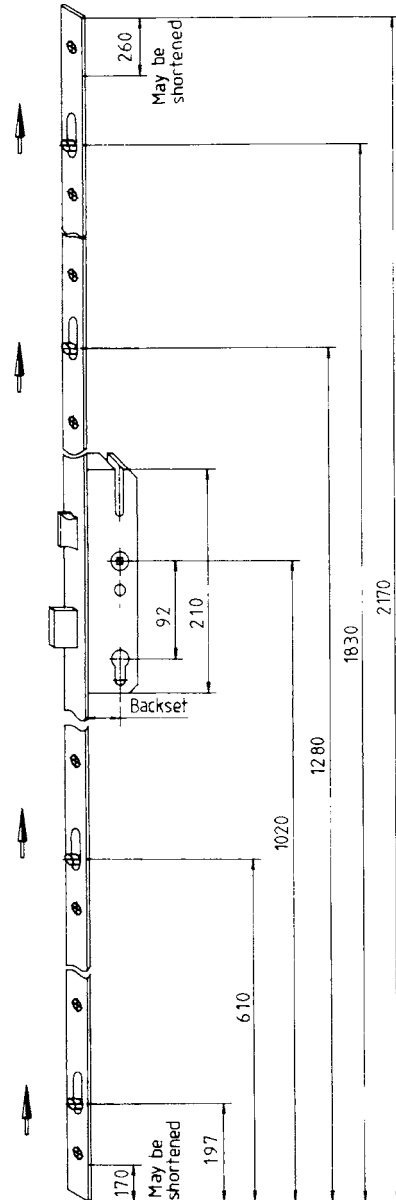

## AS 4050 4 Roller

The AS 4050 is a multipoint lock for use on residential doors where only a basic level of security is required.

The lock is a lever operated multipoint lock featuring 4 brass roller cams, a reversible latch and an anti-saw deadbolt as standard.

- Roller cams compression adjustable +/-1mm
- Suits standard 92mm Pz handles
- Range of backsets available
- 24mm "U" track faceplate version also available

## Part Numbers

Description	Type	Backset (mm)	Rollers	Part No. 24mm U	Part No. 16mm Flat
AS 4050 Multipoint Lock	Standard	25	4	047410*	047320
AS 4050 Multipoint Lock	Standard	28	4	047415*	047325
AS 4050 Multipoint Lock	Standard	30	4	047420*	047330
AS 4050 Multipoint Lock	Standard	35	4	047425	047335
AS 4050 Multipoint Lock	Standard	40	4	047430*	047340
AS 4050 Multipoint Lock	Standard	45	4	-	047345

\* special order only

## Guarantees & Accreditations

Mechanical Guarantee	5 years
Labour Guarantee	2 years

