


### Technical Data

Application	Side hung
Stack Height (mm)	13, 17
Size (inches)	12,16
Max. Sash Weight (kg)	21
<b>Material Specification:</b>	
Tracks	304 or 430 stainless steel
Links	304 or 430 stainless steel
Rivets	302 stainless steel
End Moulding	Zinc die cast
End Spacer	Nylon 6
Box Quantity	25

### Technical Drawings

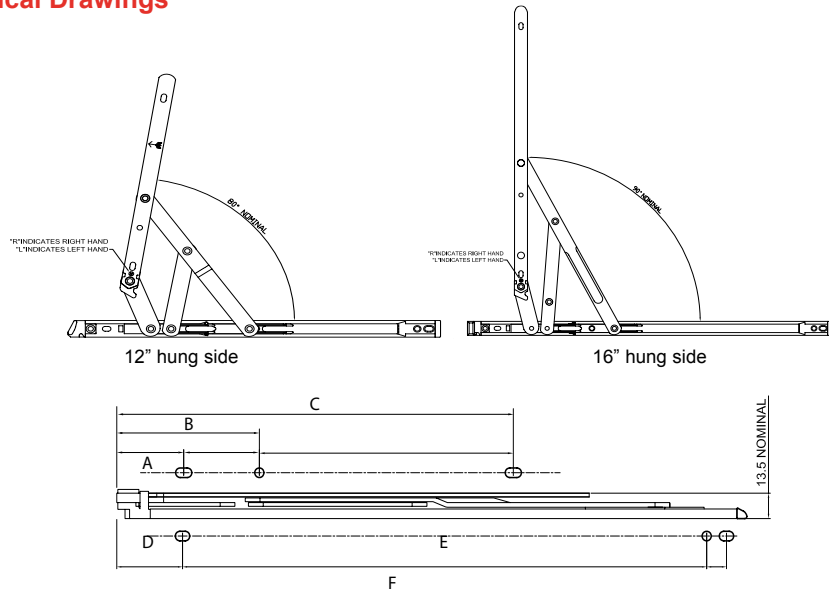

### Fixing Hole Details

Description	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)
Side Hung 12"	37.2	79.2	220.2	36.5	291	338.5
Side Hung 16"	37.2	142.7	355.2	36.5	385.45	432.95

## Ideal Egress Easy-Clean Friction Stay

The Ideal egress easy-clean stay combines emergency egress with an easy-clean facility. It offers improved security and weathersealing through the use of a colour coded, handed, nylon, end-cap and has been designed to offer smooth closure and high performance.

- Almost 90° opening for easy egress
- Allows casement windows (dependent upon size) to satisfy the egress requirements of Document B of the Building Regulations, ie:
 

“For emergency egress any window should have an unobstructed openable area that is at least 0.33m square and at least 450mm high and 450mm wide ”
- Available in 12" and 16" for side hung egress applications
- Available in both 13mm & 17mm stack heights to suit most common casement profiles



### Recommended Maximum Sash

Description	Size (")	Width (mm)	Height (mm)	Weight (kg)	Opening (°)
Side Hung	12	600	1200	18	80°
Side Hung	16	600	1200	21	90°

### Part Numbers

Description	Size (")	13mm Stack Height	17mm Stack Height
Side Hung	12	023438C	023488C
Side Hung	16	023440C	023490C

### Guarantees & Accreditations

Mechanical Guarantee	10 years
Labour Guarantee	2 years

to place your order simply call our sales team direct on 01327 312 400