

Espags & Shootbolts





Choosing Your Window Locking System

IDENTIFICATION

1. Identify the Type of Locking System Required



Mushroom Espagnolette

A gearbox operating a drive bar with one or more mushroom cams. The mushroom headed cams offer weather sealing and a basic level of security. There are two types of mushroom espagnolette systems:

Standard: espagnolette which operates on profile systems with a eurogroove

U-Track: espagnolette which operates on profile systems without a eurogroove



Twin Cam Espagnolette

A gearbox operating a drive bar with either twin mushroom cams or a combination of mushroom cams and hook bolts like the ProLinea twin cam on page 52. They provide enhanced security to when compared to standard espagnolettes and faster fabrication when compared to shootbolts.



Shootbolt Espagnolette

A central gearbox operating a combination of mushroom cams and steel shootbolt extensions. The shootbolts secure into strikers at the top and bottom of the frame providing enhanced security to PAS24: 2012 (dependant upon profile system). The main type of shootbolt system we sell is 'croppable' which enables shootbolt extensions to be cropped to size.



Tongue Espagnolettes

A gearbox operating a drive bar with two or more tongues. Typically used on top or bottom hung fully reversible windows or timber windows.

2. Identify The Backset & Cam Height Required



Backset

Measure the distance from the gearbox faceplate to the centre of the square spindle hole. Backset dimensions will generally be either: 19, 20, 22 or 25mm backset.



Cam Height

Measure the distance from the faceplate to the top of the mushroom cam.

3. Identify the Strikers Required to Suit Your Profile System

Identify the number and combination of strikers required, as dictated by the locking system selected and size of window to be manufactured. Mila have strikers to suit all major profile systems - these are listed on the casement striker matrix on pages 66 to 69.

Espags & Shootbolts Selection Guide



AT A GLANCE PRODUCT MATRIX

	Page	Type: Shootbolt	Type: Espag	Backset: 20mm	Backset: 22mm	Backset: 25mm	Cam Height: 7.7mm	Cam Height: 8mm	Cam Height: 9mm	Cam Height: 9.5mm	Cam Height: 13mm	Locking: Blade	Locking: Cams	Locking: Shootbolts	Locking: Hooks & cams	Accreditation: Secured by Design	Guarantee: 2 Year Mechanical	Guarantee: 5 Year Mechanical	Guarantee: 10 Year Mechanical
iDeal Mushroom Espag	35		✓	✓	✓			✓	✓				✓						✓
iDeal Offset U-track Espag	37		✓		✓			✓	✓				✓						✓
ProLinea Twin Cam Espag	39		✓	✓	✓			✓	✓				✓			✓			✓
ProLinea Gearbox & Shootbolt	41	✓		✓	✓			✓	✓	✓			✓	✓		✓			✓
ProLinea Twin Cam Low Handle Height	43		✓	✓	✓			✓	✓				✓			✓			✓
Siegenia Trident Espag	45		✓	✓	✓			✓		✓					✓	✓			✓
Yale Rapide	47		✓	✓	✓							✓				✓			✓
Yale Encloser Twin Cam Espag	49		✓	✓	✓		✓		✓				✓			✓			✓
Yale Shootbolt Espag	51	✓		✓	✓		✓		✓				✓	✓		✓			✓



iDeal Mushroom Espag

Standard Security Window Locking System

PRODUCT INFORMATION



- Fits standard and reduced depth eurogrooves
- 1, 2 or 3 mushroom-headed steel cams
- Compression adjustable mushroom cams (+/- 1mm)
- Option of 8mm or 9mm cams
- 16mm travel
- Option of 20mm or 22mm backset
- 16mm Mild steel faceplate
- Size range: 110min - 1200max
- U-track version available to suit profile systems without a eurogroove
- Simple to fit
- Strikers available on request

CLOSE-UP



Smooth gearbox operation



Adjustable mushroom cams

GUARANTEE




iDeal Mushroom Espag

Standard Security Window Locking System



TECHNICAL DRAWINGS

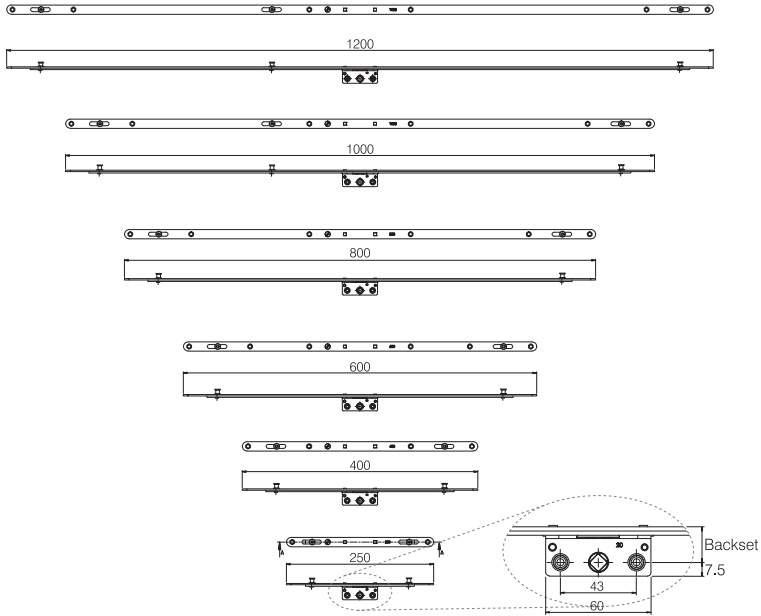

PART NUMBERS

Description	Backset (mm)	Size (mm)	Application Range (mm)	Cams	8mm Cams	9mm Cams
iDeal Mushroom Espag	20	110	140-280	1	033401	033421
iDeal Mushroom Espag	20	250	281-430	2	033402	033422
iDeal Mushroom Espag	20	400	431-630	2	033404	033424
iDeal Mushroom Espag	20	600	631-830	2	033406	033426
iDeal Mushroom Espag	20	800	831-1030	2	033408	033428
iDeal Mushroom Espag	20	1000	1031-1230	3	033410	033430
iDeal Mushroom Espag	20	1200	1231-1400	3	033412	033432
iDeal Mushroom Espag	22	110	140-280	1	033601	033621
iDeal Mushroom Espag	22	250	281-430	2	033602	033622
iDeal Mushroom Espag	22	400	431-630	2	033604	033624
iDeal Mushroom Espag	22	600	631-830	2	033606	033626
iDeal Mushroom Espag	22	800	831-1030	2	033608	033628
iDeal Mushroom Espag	22	1000	1031-1230	3	033610	033630
iDeal Mushroom Espag	22	1200	1231-1400	3	033612	033632



iDeal Offset U-Track Mushroom Espag

Standard Security Window Locking System

PRODUCT INFORMATION



- For profile systems without a eurogroove
- 2 or 3 mushroom-headed steel cams
- Compression adjustable mushroom cams (+/- 1mm)
- Option of 7mm or 8mm cams
- 16mm travel
- 22mm backset
- 16mm Mild steel faceplate
- Size range: 250min - 1200max
- Operation reliability - achieved 20,000 cycles under load
- Salt spray tested to 240 hours
- Simple to fit
- Strikers available on request

GUARANTEE




iDeal Offset U-Track Mushroom Espag

Standard Security Window Locking System

Espags & Shootbolts



TECHNICAL DRAWINGS

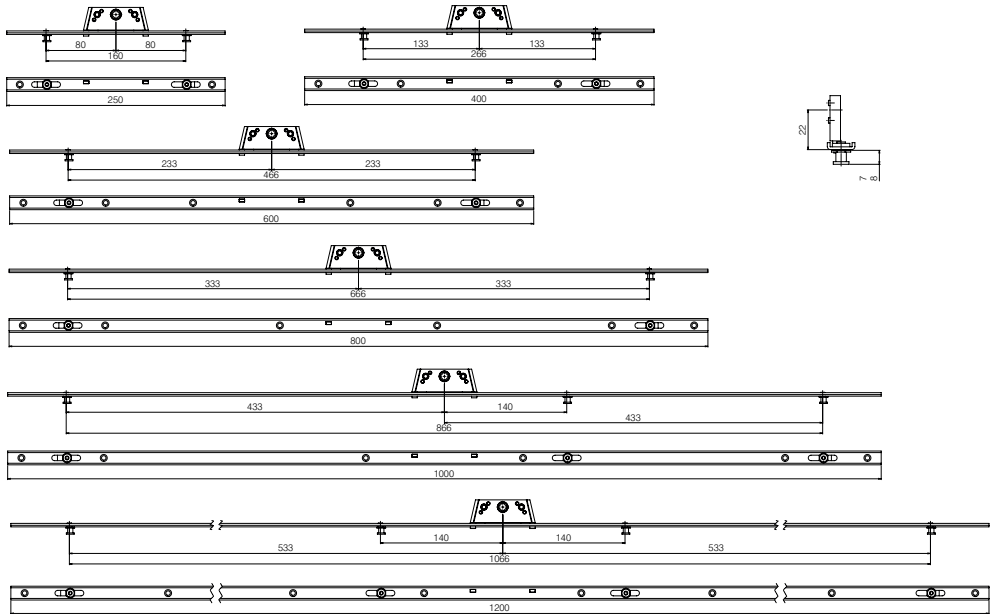

PART NUMBERS

Description	Backset (mm)	Size (mm)	Application Range (mm)	Cams	7mm Cams	8mm Cams
iDeal Mushroom U-Track Espag	22	250	250-429	2	033202	033232
iDeal Mushroom U-Track Espag	22	400	430-630	2	033204	033234
iDeal Mushroom U-Track Espag	22	600	631-830	2	033206	033236
iDeal Mushroom U-Track Espag	22	800	831-1030	2	033208	033238
iDeal Mushroom U-Track Espag	22	1000	1031-1230	3	033210	-
iDeal Mushroom U-Track Espag	22	1200	1231-1400	3	033212	-



ProLinea Twin Cam Espag

Twin Cam Window Locking System



PRODUCT INFORMATION



- Twin cam anti-jemmy locking points
- Adjustable, steel mushroom cams for enhanced security
- Options of 20mm & 22mm backset with 8mm, 9mm
- 16mm faceplate
- Meets the enhanced security requirements of PAS24: 2016
- Operational reliability - independently tested to 20,000 cycles
- Weather resistant - independently tested to 240 hours salt spray
- Handing indicator & backset size on gearbox for easy identification
- Available in 340mm - 1150mm to suit a range of window sizes
- Suitable for PVCu applications as well as timber & aluminium applications with a Eurogroove
- NightSecure® strikers available to suit

CLOSE-UP



Open position



Locked position



Steel mushroom cam



Quick view handing indicator

GUARANTEES



COMPLIANCE




ProLinea Twin Cam Espag

Twin Cam Window Locking System



TECHNICAL DRAWINGS

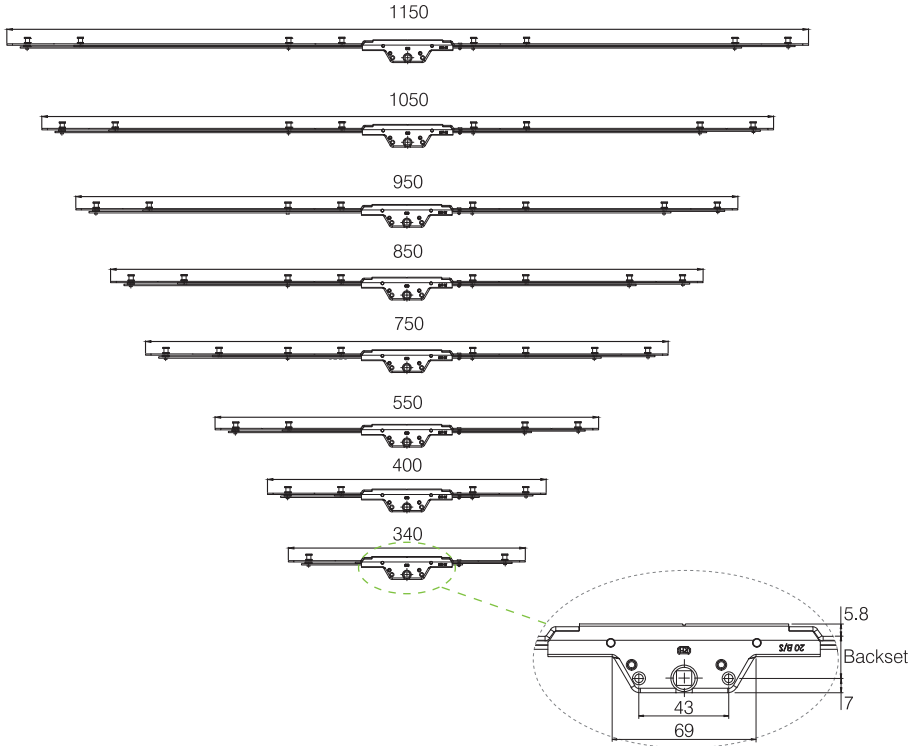

PART NUMBERS

Description	Size (mm)	No. of Cams	Application Range (mm)	20mm backset 8mm cams	20mm backset 9mm cams	22mm backset 8mm cams	22mm backset 9mm cams
ProLinea Twin Cam Espag	340	2	370-430	031663	031683	031863	031883
ProLinea Twin Cam Espag	400	4	431-580	031664	031684	031864	031884
ProLinea Twin Cam Espag	550	4	581-780	031666	031686	031866	031886
ProLinea Twin Cam Espag	750	8	781-880	031668	031688	031868	031888
ProLinea Twin Cam Espag	850	8	881-980	031669	031689	031869	031889
ProLinea Twin Cam Espag	950	8	981-1080	031670	031690	031870	031890
ProLinea Twin Cam Espag	1050	8	1081-1180	031671	031691	031871	031891
ProLinea Twin Cam Espag	1150	8	1181-1400	031672	031692	031872	031892



ProLinea Gearbox & Shootbolt Espag

Shootbolt Window Locking System



PRODUCT INFORMATION



- Mushroom-headed steel cams
- Stainless steel shootbolts top and bottom
- Robust reverse action gearbox
- Concealed internal guides within gearbox for smooth operation and enhanced durability
- Slide tags simply locate over the shootbolt couplings to speed fabrication
- One size accommodates both standard and reduced depth eurogrooves
- Option of 20mm or 22mm backset
- Options of without or with mushroom cams in sizes 8mm, 9mm or 13mm
- Compression adjustable mushroom cams (+/- 1mm)
- Independently tested to 20,000 cycles for operational reliability
- Strikers available on request

CLOSE-UP



Stainless steel or mild steel shootbolts



Slide 'n' secure technology for faster fabrication



Backset marked on gearbox

GUARANTEES




ProLinea Gearbox & Shootbolt Espag

Shootbolt Window Locking System




TECHNICAL DRAWINGS

With Mushroom Cams

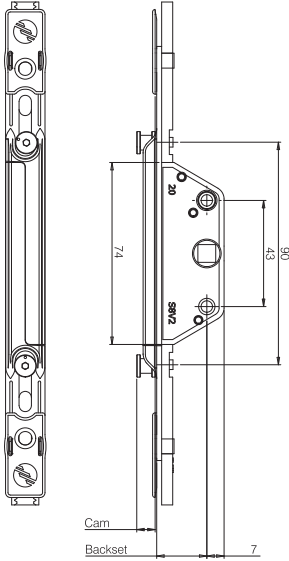

Without Mushroom Cams

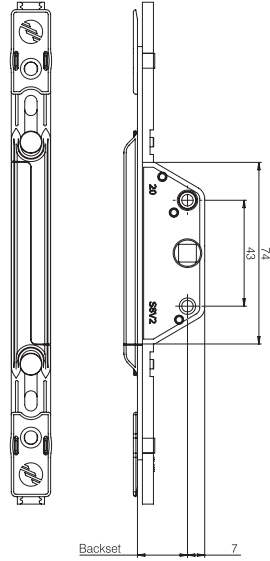

PART NUMBERS

Description	Backset (mm)	No Cams	8mm Cams	9mm Cams	13mm Cams
ProLinea Espag Gearbox	20	037400	037402	037404	037405
ProLinea Espag Gearbox	22	037406	037408	037410	-

Description	Size (mm)	Application Range (mm)	No Cams	8mm Cams	9mm Cams	13mm Cams
Stainless Steel Extensions (Gr. 118)	118	330-400	037742	-	-	-
Stainless Steel Extensions (Gr. 168)	318	400-800	-	037744	037734	037724
Stainless Steel Extensions (Gr. 218)	518	800-1200	-	037746	037736	037726
Stainless Steel Extensions (Gr. 268)	718	1200-1600	-	037748	037738	037728
Mild Steel Extensions (Gr. 318)	118	330-400	037752	-	-	-
Mild Steel Extensions (Gr. 368)	318	400-800	-	037754	037764	-
Mild Steel Extensions (Gr. 418)	518	800-1200	-	037756	037766	-
Mild Steel Extensions (Gr. 468)	718	1200-1600	-	037758	037768	-



ProLinea Twin Cam Espag

For Low Handle Heights



PRODUCT INFORMATION



- Twin cam anti-jemmy locking points
- Meets the enhanced security requirements PAS24: 2016
- Operational reliability - tested to 20,000 cycles
- Corrosion resistant - tested to 240 hours salt spray
- Adjustable, steel mushroom cams for enhanced security
- Options of 20mm & 22mm backset with 8mm & 9mm cams
- 16mm faceplate
- Handing indicator & backset size on gearbox for easy identification
- Available in 600mm - 1200mm to suit a range of window sizes
- Suitable for PVCu applications as well as timber & aluminium applications with a eurogroove
- NightSecure® strikers available to suit

CLOSE-UP



Open position



Locked position



Steel headed mushroom cam



Quick view handing indicator

GUARANTEES



COMPLIANCE







ProLinea Twin Cam Espag

For Low Handle Heights



TECHNICAL DRAWINGS

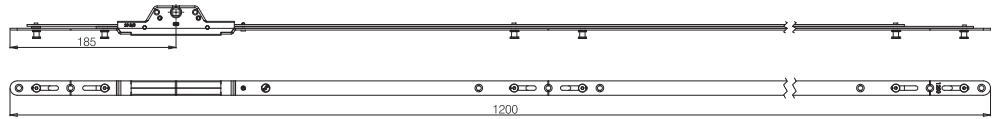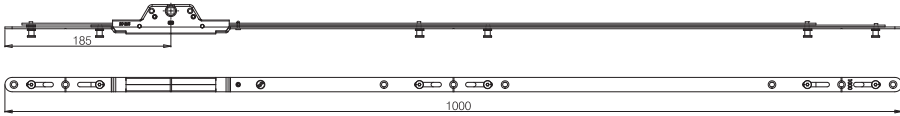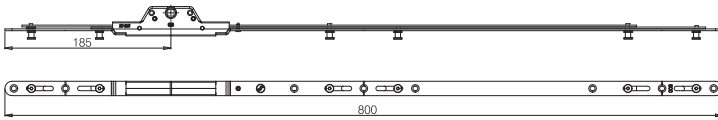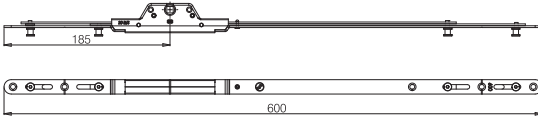

PART NUMBERS

Description	Size	Application Range	Backset (mm)	8mm Cams	9mm Cams
ProLinea Low Level Twin Cam	600	630 - 830	20	031706	031726
ProLinea Low Level Twin Cam	800	831 - 1030	20	031708	031728
ProLinea Low Level Twin Cam	1000	1031 - 1230	20	031710	031730
ProLinea Low Level Twin Cam	1200	1231 - 1400	20	031712	031732
Description	Size		Backset (mm)	8mm Cams	9mm Cams
ProLinea Low Level Twin Cam	600	630 - 830	22	031906	031926
ProLinea Low Level Twin Cam	800	831 - 1030	22	031908	031928
ProLinea Low Level Twin Cam	1000	1031 - 1230	22	031910	031930
ProLinea Low Level Twin Cam	1200	1231 - 1400	22	031912	031932



Trident Espag

Hook & Cam Window Locking System

SIENIA[®]
brings spaces to life

Secured by Design




PRODUCT INFORMATION



- 2 hooks for enhanced security
- 2 or 4 mushroom cams enhance sealing - choice of 8mm or 9.5mm cams
- Hook & cam combination provides strong anti-separation device
- Simultaneous hook & cam travel
- Option of 20mm & 22mm backset
- Mild steel faceplate
- Size range 300mm min to 1250mm max
- No cropping speeds fabrication by 30% when compared to shootbolts
- Meets the enhanced security requirements of PAS24: 2016
- Chromium VI free, silver coating provides 700 hours corrosion free resistance
- European design & manufacture
- Smooth reliable operation

TECHNICAL DRAWINGS

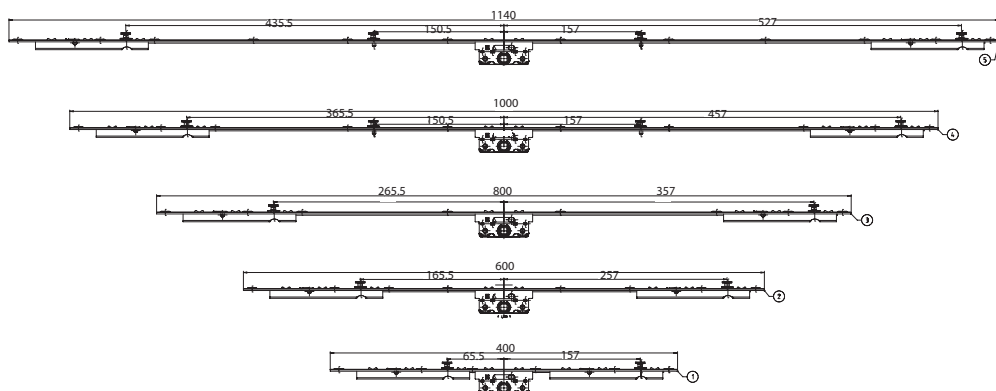

Trident Espag

Hook & Cam Window Locking System

SIENIA[®]
brings spaces to life

Espags &
Shootbolts



PART NUMBERS

Description	Backset (mm)	Size (mm)	Size Range (mm)	Hooks	Cams	8mm Cams	9.5mm Cams
Trident Espag	20	300	330-480	0	2	349103	349123
Trident Espag	20	450	481-680	2	2	349104	349124
Trident Espag	20	650	681-880	2	2	349106	349126
Trident Espag	20	850	881-1080	2	2	349108	349128
Trident Espag	20	1050	1081-1280	2	4	349110	349130
Trident Espag	20	1250+	1281-1400	2	4	349112	349132
Trident Espag	22	300	330-480	0	2	349143	349163
Trident Espag	22	450	481-680	2	2	349144	349164
Trident Espag	22	650	681-880	2	2	349146	349166
Trident Espag	22	850	881-1080	2	2	349148	349168
Trident Espag	22	1050	1081-1280	2	4	349150	349170
Trident Espag	22	1250+	1281-1400	2	4	349152	349172

STRIKERS

Profile	Part Number
Veka Matrix 70	382301
Veka Matrix 70 Sculptured / Veka Matrix 58	382321
Profile 22	382760
Spectus Sightline 70	382600
Spectus Elite 70	383160
Rehau 706 (or 4920) Synseal Legend	382700
Plastmo Index	382900
Kommerling Gold / WHS System 10 / WHS Rustique	383020
Deceuninck 2500 / 2800 / 3000	please contact the Mila sales team
Duraflex Diamond	383100
Synseal Synerjy / Eurocell 70mm	383120
Eurocell Logic	383180
KBE System 70	384461
Selecta Advance 70	384920

Strikers for other profiles available on request

GUARANTEES





Yale Rapide

Security Window Locking System



Secured by Design



Police Preferred Specification

PRODUCT INFORMATION




Yale Rapide offers greater lock engagement for additional security as it connects along the full length of the keep.

The aluminium channel uses the full depth of the eurogroove to enhance the strength of the window - some systems can reach PAS24 without the need for additional re-enforcement.

- 30mm and 60mm keeps with night vent position
- 20mm and 22mm backsets
- Suitable for sash sizes from 220mm to 1629mm
- Reliability tested to 30,000 cycles
- Tested to 240 hour salt spray
- Suits all profile systems
- Easy to fit
- Strikers available on request

CLOSE-UP



Rapide locking points, connecting along full length of keep



Aluminium channel



Reversible gearbox

GUARANTEES




Secured by Design



Police Preferred Specification



TECHNICAL DRAWINGS

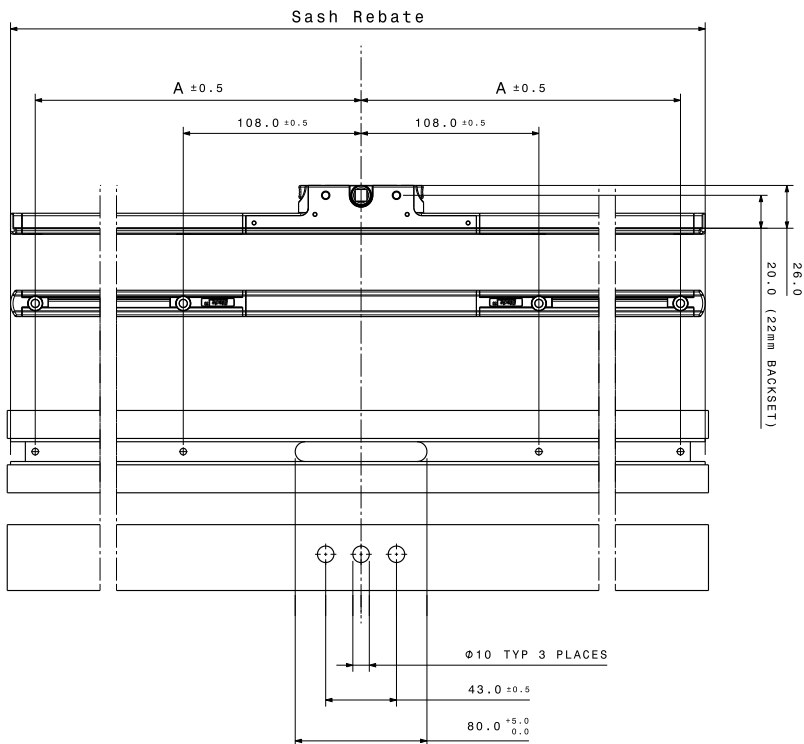

PART NUMBERS

Description	Dimension A	Size Range (mm)	20mm Backset	22mm Backset
Yale Rapide Espag	185	400-519	035104	035124
Yale Rapide Espag	245	520-639	035105	035125
Yale Rapide Espag	305	640-759	035106	035126
Yale Rapide Espag	365	760-879	035108	035128
Yale Rapide Espag	425	880-999	035109	035129
Yale Rapide Espag	485	1000-1119	035110	035130
Yale Rapide Espag	545	1120-1239	035111	035131
Yale Rapide Espag	605	1240-1239	035112	035132
Yale Rapide Espag	665	1360-1479	035114	035134
Yale Rapide Espag	725	1480-1599	035115	035135



Yale Encloser

Twin Cam Window Locking System



PRODUCT INFORMATION



The Yale Encloser's anti separation 'mushroom' cams work in pairs locking from either side into robust zinc alloy strikers.

Optimal security performance and weather proofing is achieved through easy adjustment of the mushroom cams.


- Encloser twin cam espag range covers all sash sizes from 270mm – 1400mm
- Bi-directional locking cams
- 4 or 6 mushroom cams enhance sealing - choice of 7.7mm or 9mm cams
- 20mm and 22mm backset
- Simple compression adjustment
- Suitable for sash sizes 270mm to 1400mm
- Corrosion resistance to EN1670:2007 Grade 4
- Operational reliability tested to 50,000 cycles
- Strikers available on request

GUARANTEES





TECHNICAL DRAWINGS

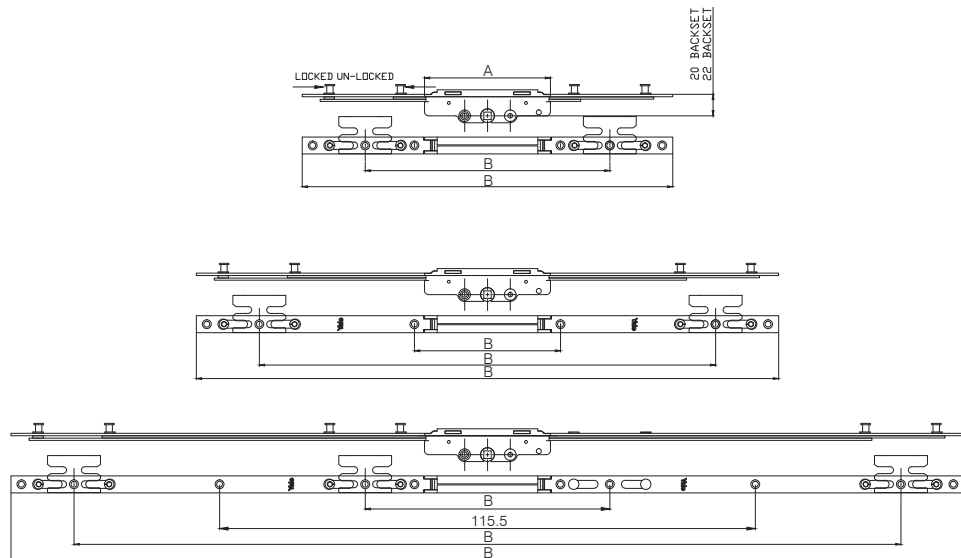

PART NUMBERS

Description	Size	Size Range (mm)	Backset	No. of mushroom cams	7.7mm Cam	9mm Cam
Yale Twin Cam Encloser	1	270 - 350	20mm	4	035501	035511
Yale Twin Cam Encloser	2	350 - 600	20mm	4	035502	035512
Yale Twin Cam Encloser	3	550 - 800	20mm	4	035503	035513
Yale Twin Cam Encloser	4	750 - 950	20mm	6	035504	035514
Yale Twin Cam Encloser	5	900 - 1100	20mm	6	035505	035515
Yale Twin Cam Encloser	6	1050 - 1250	20mm	6	035506	035516
Yale Twin Cam Encloser	7	1200 - 1400	20mm	6	035507	035517
Yale Twin Cam Encloser	1	270 - 350	22mm	4	035521	035531
Yale Twin Cam Encloser	2	350 - 600	22mm	4	035522	035532
Yale Twin Cam Encloser	3	550 - 800	22mm	4	035523	035533
Yale Twin Cam Encloser	4	750 - 950	22mm	6	035524	035534
Yale Twin Cam Encloser	5	900 - 1100	22mm	6	035525	035535
Yale Twin Cam Encloser	6	1050 - 1250	22mm	6	035526	035536
Yale Twin Cam Encloser	7	1200 - 1400	22mm	6	035527	035537




Yale Shootbolt Espag

Shootbolt Window Locking System



PRODUCT INFORMATION

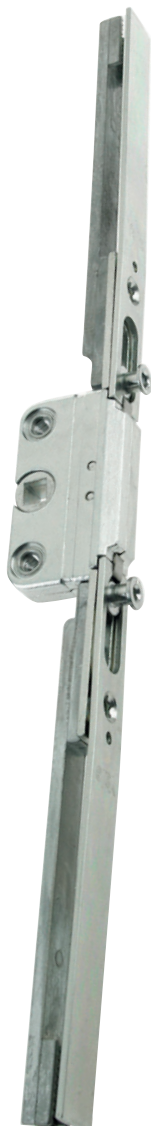

The Yale Shootbolt window lock combines anti-separation 'mushroom' cams and chamfered security shootbolts that lock into robust zinc alloy strikers.

Optimal security performance and weather proofing can be achieved through adjustment of the mushroom cams.

A choice of cropping and non-cropping variants ensures that there is a system to suit both manufacturing and stocking preferences, covering all sash sizes from 326mm and 1520mm.

- 20mm and 22mm backset
- Choice of 7.7mm or 9mm cams
- Profile related strikers available
- Sash sizes 326mm to 1570mm (326 - 474 shootbolt only)
- Corrosion resistance to EN1670:2007 Grade 4
- Tested to a minimum of 50,000 cycles
- Strikers available on request

GUARANTEES



Yale Shootbolt Espag

Shootbolt Window Locking System




Espags & Shootbolts




TECHNICAL DRAWINGS

Extendable Gearbox

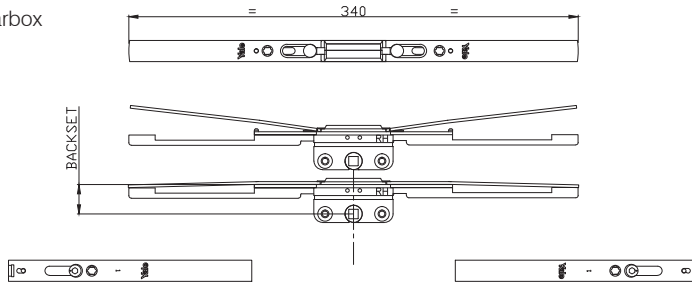

Standard Gearbox

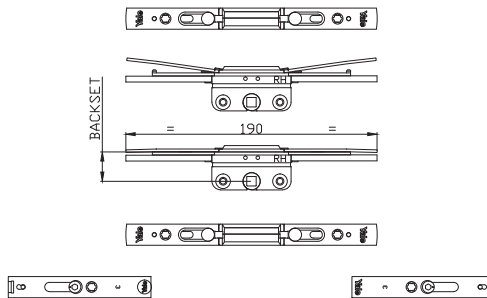

PART NUMBERS

Description	Backset	Size Range (mm)	No Cam	7.7mm Cam	9mm Cam
Yale Standard Gearbox	20mm	326 - 474	036110	036111	036112
Yale Standard Gearbox	22mm	326 - 474	036109	036113	036114
Yale Extendable Gearbox	20mm	475 - 522	-	036115	036116
Yale Extendable Gearbox	22mm	475 - 522	-	036117	036118

Description	Size	Size Range (mm)	No. of mushroom cams		
			No Cam	7.7mm Cam	9mm Cam
Yale Shootbolt Extension Rod	1	522 - 670	1	036261	036271
Yale Shootbolt Extension Rod	2	670 - 820	1	036262	036272
Yale Shootbolt Extension Rod	3	820 - 970	1	036263	036273
Yale Shootbolt Extension Rod	4	970 - 1120	2	036264	036274
Yale Shootbolt Extension Rod	5	1120 - 1270	2	036265	036275
Yale Shootbolt Extension Rod	6	1270 - 1420	2	036266	036276
Yale Shootbolt Extension Rod	7	1420 - 1570	2	036267	036277
				No Cam	
Yale Shootbolt Extension Rod	0		0	036260	



Caseмент Strikers Selection Guide

Profile System	Steel Mushroom Striker	Steel Shootbolt Striker	Handle Spindle (mm)	Friction Hinge Stack Height (mm)
BEAUFORT ALUMINIUM	38223			
DECEUNINICK 2500	038227	038324	40	17
DECEUNINICK 2800	038227	038324	40	17
DECEUNINICK 3000	038224	038324	40	17
DECEUNINICK FLUSH CASEMENT	038214	038314	40	13
DURAFLEX DIAMOND	038206	038306	20	13
EUROCELL LOGIC	038209	038309	40	17
EUROCELL LOGIC -1mm	038225	038325	40	17
EUROCELL ULTIMATE	038213	038313	30	13
KOMMERLING C70/70	038211	038311	40	17
LB 8000	na	na	40	17
LINEAR	038210	038310	40	17
PROFILE 22	038204	038304	30	13
PROFILE 22 OPTIMA	TBC	TBC	40	13
REHAU S706 and REHAU EDGE	038218/229	038318/329	20	17
REHAU TOTAL 70c and 70s	038217	038317	20	17
REHAU TRITEC	038212	038312	40	17
SELECTA ADVANCE	038219	038319	25	13
SPECTUS ELITE 70	038205	038305	20	17
SWISH 24/7	038204	038304	40	13
SYNSEAL LEGEND (Ogee)	038217	038317	25	17
SYNSEAL SERIES 6 / EVOLVE	038216	038316	30	13
SYNSEAL SHIELD	038216	038316	30	13
SYNSEAL SHIELD -1mm	038222	038322	30	13
SYNSEAL SYNERGY	038215	038315	30	13
SYNSEAL SYNERGY -1mm	038221	038321	30	13
SYNSEAL WARMCORE	038228		40	17
TIMBER 0 DEGREE				
TIMBER 7 DEGREE				
VEKA 58	038200	038300	30	13
VEKA 70	038201	038301	40	13
VEKA FS	038202	038302	40	13
WHS ESTHETIQUE	038220	038320	30	17
WHS HALO ECLIPSE	038214	038314	30	17
WHS HALO ECLIPSE -1mm	038220	038320	30	17
WHS HALO RUSTIQUE	038203	038303	40	17
WHS HALO SYSTEM 10	038203	038303	40	17

Casement Strikers Selection Guide



Zinc Mushroom Striker	Zinc Shootbolt Striker	Espag Backset (mm)	Cam Height (mm)
038906	038905	20	9
038908	038907	20	9
038908	038907	20	9
		22	8
038898A	038897A	20	8
038896		20 (22 if no reinforcement)	9
038896		20 (22 if no reinforcement)	9
038912 (038853 COMBO)	038853 (COMBO)	20	9
038902		22	9
038916		22	8
038914	038913	22	8
038916		22	8
		22	8
038817	038816	20	8
038817	038816	20	8
038808 (038810P)	038809 (038809P)	22	8
038910	038911	20	9
038825	038824	20	8
		22	8
038817	038816	20	9
		22	9
038835	038834	22	9
038835	038834	22	9
038890	038889	22	9
038890	038889	22	9
		22	9
038926			9
038928			9
038851 (combo)	038851 (combo)	22	8
038815	038814	22	8
038922		22	8
038924		20	8
038924		20	8
038924		20	8
038904	038903	20	9
038881	038880	20	9



PRODUCT INFORMATION



Mushroom Striker



Shootbolt Striker

- Enhanced security striker range
- The one-striker-fits-all design is suitable for use with all Mila espags - including mushroom, twin cam and shootbolt - to ease fabrication, increase efficiency and reduce stock holding
- Profile related - see table on opposite page
- Successfully tested to the enhanced security requirements of PAS24: 2016, including in night vent mode
- Police preferred specification - Secured by Design approved product

GUARANTEES





PART NUMBERS

Profile System	Steel Mushroom Striker	Steel Shootbolt Striker
Veka 70	038201	038301
Veka FS	038202	038302
WHS Halo System 10	038203	038303
WHS Halo Rustique	038203	038303
Swish 24/7	038226	038326
Spectus Elite 70	038205	038305
Duraflex Diamond	038206	038306
Deceuninick 2500	038227	038324
Deceuninick 2800	038227	
Deceuninick 3000	038224	038324
Eurocell Logic	038209	038309
Eurocell Logic -1mm	038225	038325
Linear	038210	038310
Kommerling C70/70	038211	038311
Rehau Tritec	038212	038312
WHS Halo Eclipse	038214	038314
WHS Halo Eclipse -1mm	038220	038320
Whs Esthetique	038220	038320
Synseal Synergy	038215	038315
Synseal Shield	-	038316
Synseal Synergy -1mm	038221	038321
Synseal Shield -1mm	038222	038322
Synseal Legend (Ogee)	038217	038317
Rehau Total 70 (706 -2mm)	038217	038317
Rehau S706	038218	038318
Selecta Advance	038219	038319
Beaufort Aluminium	038223	-
Other strikers available on request		

Lined area for notes with horizontal ruling lines.

